


SolarEdge Home Battery

High Voltage, for Australia

BAT-10K1P

BATTERIES

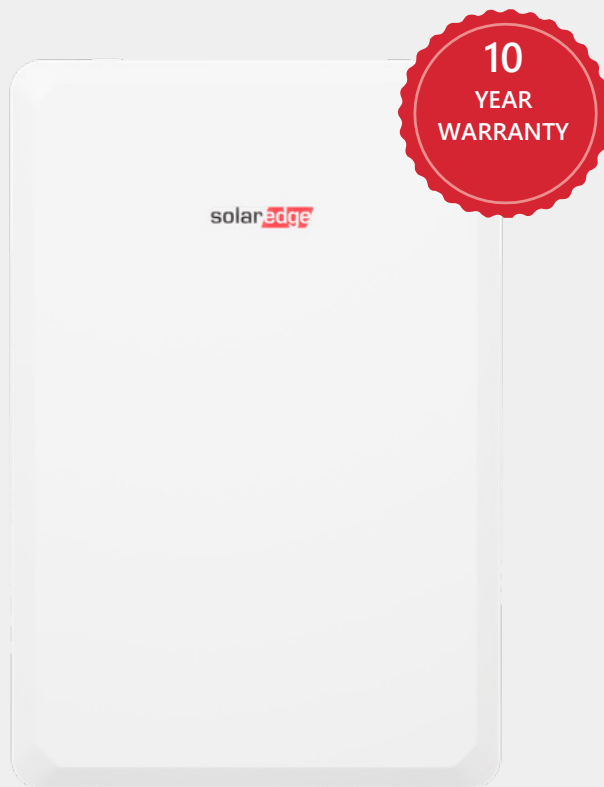

Optimised for SolarEdge Energy Hub and SolarEdge Genesis Inverters

- Maximized system performance, gaining more energy to store and use for on-grid and backup power applications
- Integrates with the complete SolarEdge residential offering, providing a single point of contact for warranty, support, training, and simplified logistics & operations
- DC coupled battery featuring superior overall system efficiency
- Scalable solution for increased power and capacity with multiple SolarEdge inverters and batteries
- Solar, storage, EV charging, and smart devices all monitored and managed by a single app to optimize solar production, consumption and backup* power
- Wireless communication to the inverter, reducing wiring, labor and installation faults
- Simple plug and play installation, with automatic SetApp-based configuration
- Includes multiple safety features for battery protection

* Backup applications are subject to local regulation and may require additional components and firmware upgrade

SolarEdge Home Battery

High Voltage, for Australia

BAT-10K1P

BAT-10K1PSOB-01

OUTPUT		
Usable Energy (100% depth of discharge)	9700	Wh
Continuous Output Power	5000	W
Peak Output Power in Backup (for 10 seconds)	7500	W
Peak Roundtrip Efficiency	>94.5	%
Warranty ⁽¹⁾	10	years
Voltage Range	350-450	Vdc

ADDITIONAL FEATURES		
Compatible Inverters	SolarEdge Genesis Single Phase Inverter, SolarEdge Energy Hub Single Phase Inverter	
Batteries Per Inverter	Up to 3 ⁽²⁾	
Communication Interfaces	Wireless and RS485 ⁽³⁾	

STANDARD COMPLIANCE		
Certification	Cell	IEC 62619, UL1642
	Battery	IEC 62619, UN38.3, UL1973, UL9540
Emissions	IEC61000-6-1, IEC61000-6-2, IEC61000-6-3	

INSTALLATION SPECIFICATIONS		
Dimensions (W x H x D)	790 x 1179 x 250	mm
Weight	121	kg
Mounting	Floor ⁽⁴⁾ or wall mount ⁽⁵⁾	
Operating Temperature ⁽⁶⁾	-10 to +50	°C
Storage Temperature (more than 3 months)	-10 to +30	°C
Storage Temperature (less than 3 months)	-30 to +60	°C
Enclosure Protection	IP55 - indoor and outdoor	
Maximum Altitude	2000	m
Cooling	Natural convection	
Noise at 1m Distance	<25	dBA

(1) For warranty details, see the SolarEdge Home Battery Limited Warranty.

(2) Installations with multiple SolarEdge Home Batteries require a pair of branch connectors (DC + and DC -) per battery excluding the last battery. The branch connectors should be purchased separately.

(3) The SolarEdge Home Battery is designed for use with SolarEdge Home Network for wireless communication. The inverter might require a matching SolarEdge Home Network Plug-in (more details [here](#)). Using RS485 could reduce the usable energy to 9500Wh.

(4) The floor stand is purchased separately. One floor stand is required per SolarEdge Home Battery. See the Accessories' PN table below.

(5) Wall mount installation requires handles that should be purchased separately. See the Accessories' PN table below.

(6) Please note that operating the SolarEdge Home Battery at extreme temperatures for extended durations of time may void the SolarEdge Home Battery's warranty coverage. See the SolarEdge Home Battery Limited Warranty.

SolarEdge Home Battery – Accessories (purchased separately)

Accessory	PN
Floor stand	IAC-RBAT-FLRSTD-01
Handles	IAC-RBAT-HANDLE-01
Branch connector (required for installation with multiple SolarEdge Home Batteries)	IAC-RBAT-RWYCBL-01
SolarEdge Home Network Plug-in	SolarEdge Home Network datasheet